

data sheets

newdome mark IV

newdome mark 4 (glass) non ventilated circular rooflight

top component:

Double glazed dome profile

comprising:

6mm clear annealed float glass outer

12mm air filled cavity

11.5mm Pilkington 'K' float glass inner

6mm Pilks 'K' float glass/4mm clear float/1.5mm interlayer

(coated side to side 3 of unit)

U value 1.9 w/m²K

Fixed using a continuous aluminium edge rail, polyester powder coated to a standard matt finish RAL colour (normally white unless otherwise specified) to a 175mm high, 12mm thick insulated GRP reinforced polyester base, with a 75mm wide, flat bottom flange for fixing direct to the roof and felting in over the bottom flange and up to the top of the GRP insulated base.

Queens Mill Road
Lockwood
Huddersfield
West Yorkshire
HD1 3PG
England

t + 44 (0) 1484 517010

f + 44 (0) 1484 517050

e sales@n-gn.co.uk


w www.glassbending.co.uk

Reg. No. 5719519
VAT No. 878033306

newdome mark 4 (polycarbonate) non ventilated circular rooflight

Fixed using a continuous aluminium edge rail, polyester powder coated to a standard matt finish RAL colour (normally white unless otherwise specified) to a 175mm high, 12mm thick insulated GRP reinforced polyester base, with a 75mm wide, flat bottom flange for fixing direct to the roof and felting in over the bottom flange and up to the top of the GRP insulated base.

newdome mk IV

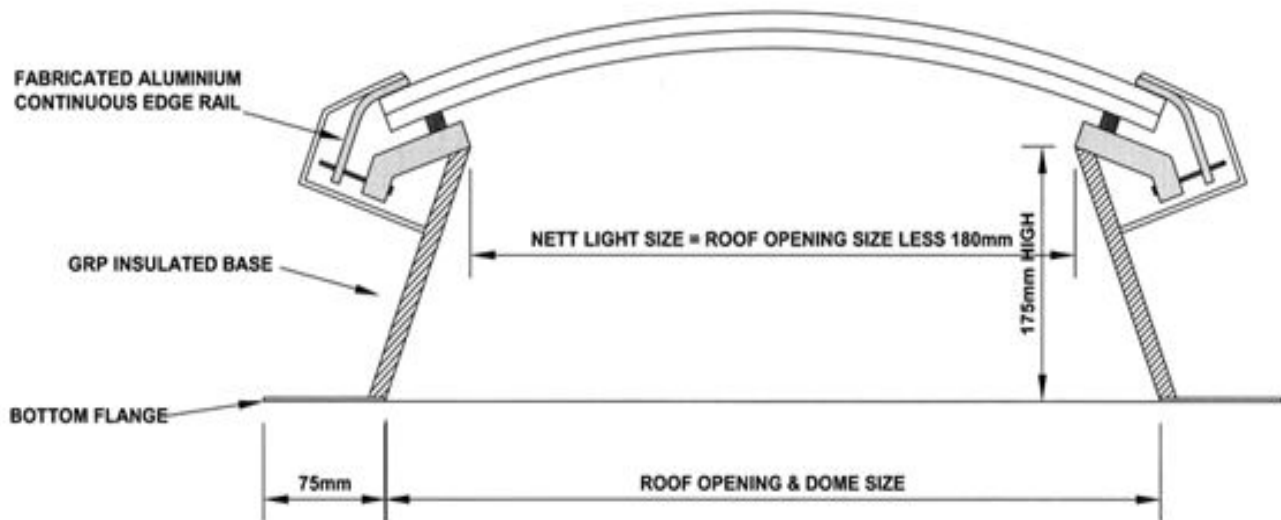

Queens Mill Road
Lockwood
Huddersfield
West Yorkshire
HD1 3PG
England

t + 44 (0) 1484 517010
f + 44 (0) 1484 517050

e sales@n-gn.co.uk
w www.glassbending.co.uk

Reg. No. 5719519
VAT No. 878033306